




Diamante direkt-indirekt LED

Aluminium schwarz RAL 9005, Diffuser mikroprismatisch UGR<19, Direkt- und Indirektlicht, Verwendung als Hängeleuchte

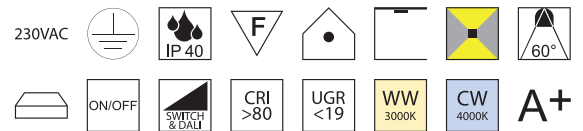

Bestell-Nr.	Lumen	dimmbar	Euro	Bestell-Nr.	Lumen	dimmbar	Euro	Bestell-Nr.	Lumen	dimmbar	Euro
LED 24W + 6W, Länge: 1149mm				LED 30W + 6W, Länge: 1435mm				LED 54W + 24W, Länge: 2579mm			
62710/115- WW	1992lm+541lm			62710/144- WW	2490lm+541lm			62710/258- WW	4482lm+2120lm		
62710/115- CW	2040lm+550lm			62710/144- CW	2550lm+550lm			62710/258- CW	4590lm+2166lm		
62710/115DALI- WW	1992lm+541lm	DALI		62710/144DALI- WW	2490lm+541lm	DALI		62710/258DALI- WW	4482lm+2120lm	DALI	
62710/115DALI- CW	2040lm+550lm	DALI		62710/144DALI- CW	2550lm+550lm	DALI		62710/258DALI- CW	4590lm+2166lm	DALI	
LED 36W + 12W, Länge: 1721mm				LED 66W + 24W, Länge: 3151mm							
62710/172- WW	2988lm+1082lm			62710/315- WW	5478lm+2120lm			62710/315- WW	5478lm+2120lm	DALI	
62710/172- CW	3060lm+1105lm			62710/315- CW	5610lm+2166lm			62710/315DALI- WW	5478lm+2120lm	DALI	
62710/172DALI- WW	2988lm+1082lm	DALI		62710/315DALI- CW	5610lm+2166lm	DALI		62710/315DALI- CW	5610lm+2166lm	DALI	
62710/172DALI- CW	3060lm+1105lm	DALI									

67



1149 / 1435 / 1721 / 2579 / 3151

Abhängungsset mit Schnellspanneinheit


Profilabhängung inkl. Schnellspanneinheit

Einpeiseset mit Anschlusskabel 2000mm

Anschlusskabel 2000 mm



Bestell-Nr.	Seillänge	Euro
62742/150	1500mm	
62742/300	3000mm	

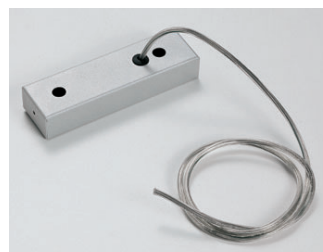

Bestell-Nr.	Kabel	Euro
62752/3	3-polig	
62752/5	5-polig	